



LCD Motorized Flip Up Device

Introduction:

LCD motorized flip up device is designed for advanced conference system, like luxury conference room, trading room, meeting room, multimedia network system and high-grad office.

When multimedia meeting, the LCD motorized flip up device can be flip up separately, grouply or all display the multimedia information including the meeting content, information hint and picture information, ect. It's widely used for video conference system, TV conference system and financial analyzing system and so on.

When turn on the LCD motorized flip up device, the screen will turned to 120 degree, 105 degree and 90 degree when open the device, keyboard and mouse will also rise to the same position of the desktop which customized according to different LCD flip up device; when turn off the LCD motorized flip up device, the screen, keyboard and mouse will be automatically hided into the table.

The product adopts intelligent circuit board and multifunctional motor. It runs smoothly, quietly, and provided with the protection function f the LCD monitors by cutting the power off automatically. The panel switch adopts the durable and excellent material's nice-looking film switch. The product support RS-485 communication protocols. It can be distantly controlled by central control. It supports wireless connection too, possessing the function of organizing the monitors into groups freely.

Images:



www.boentes.com



www.boentes.com



www.boentes.com

Detail Parameter:

BF1 Series Model

item model	BF1-17A	BF1-19A	BF1-17C	BF1-19C
Style	LCD flip up device+Monitor+Keyboard+mouse	LCD flip up device+Monitor+Keyboard+mouse	LCD flip up device+Monitor+Keyboard+mouse	LCD flip up device+Monitor+Keyboard+mouse
Product consitute	Samsung 17 Inch LED Monitor	Samsung 19 Inch LED Monitor	Samsung 17 Inch LED Monitor	Samsung 19 Inch LED Monitor
	keyboard with English& customized language	keyboard with English& customized language	keyboard with English& customized language	keyboard with English& customized language
	Wireless mouse	Wireless mouse	Wireless mouse	Wireless mouse
Material	Aluminum alloy draw bench panel	Aluminum alloy draw bench panel	carbon steel draw bench panel	carbon steel draw bench panel
Panel size	475*460*6.0mm	553*448*6.0mm	475*460*2.5mm	553*448*2.5mm
Box size	464*445*136mm	544*437*136mm	464*445*136mm	540*437*136mm
LCD monitor size	≤359*296*15mm	≤429*278*15mm	≤359*296*15mm	≤429*278*15mm
Table Hole size	477*462*6.0mm	555*450*6.0mm	477*462*2.5mm	555*450*2.5mm

Bo Ente Industrial Co., Limited

	468*449*136mm	544*437*136mm	468*449*136mm	544*437*136mm
Overturn Angle	100-105°	100-105°	100-105°	100-105°
Voltage	110V,220V,240V	110V,220V,240V	110V,220V,240V	110V,220V,240V
Power	15W	15W	15W	15W
Single trip time	25s	25s	25s	25s
Working temp	5~40	5~40	5~40	5~40
Environmental temp	20~60	20~60	20~60	20~60
Related humidity	20~80%	20~80%	20~80%	20~80%
Color	Silvery/Black matt/ Golden	Silvery/Black matt/ Golden	Silvery/Black matt/ Golden	Silvery/Black matt/ Golden
Remote distance	10m	10m	10m	10m
Control Way	Touch key-press/ Remote control/RS485 central control	Touch key-press/ Remote control/RS485 central control	Touch key-press/ Remote control/RS485 central control	Touch key-press/ Remote control/RS485 central control

Bo Ente Industrial Co., Limited

Protection way	Cable Manager/Protection finger from nipping	Cable Manager/Protection finger from nipping	Cable Manager/Protection finger from nipping	Cable Manager/Protection finger from nipping
Power protection way	Monitor+keyboard+mouse Turn on / off automatically	Monitor+keyboard+mouse Turn on / off automatically	Monitor+keyboard+mouse Turn on / off automatically	Monitor+keyboard+mouse Turn on / off automatically

BF2 Series Model

item model	BF2-17A	BF2-19A	BF2-17C	BF2-19C
Style	LCD flip up device+Monitor	LCD flip up device+Monitor	LCD flip up device+Monitor	LCD flip up device+Monitor
Product consitute	Samsung 17 Inch LED Monitor	Samsung 19 Inch LED Monitor	Samsung 17 Inch LED Monitor	Samsung 19 Inch LED Monitor
Material	Aluminum alloy draw bench panel	Aluminum alloy draw bench panel	carbon steel draw bench panel	carbon steel draw bench panel
Panel size	485*405*6.0MM	560*395*6.0mm	485*405*2.5mm	560*395*2.5mm
Box size	468*388*145mm	548*375*145mm	468*388*145mm	548*375*145mm
LCD monitor size	≤359*296*15mm	≤429*278*15mm	≤359*296*15mm	≤429*278*15mm
Table Hole size	487*407*6.0mm	562*387*6.0mm	487*407*2.5mm	562*397*2.5mm
	472*392*142.5mm	548*375*142.5mm	472*392*142.5mm	548*375*142.5mm

Bo Ente Industrial Co., Limited

Overturn Angle	100-120°	100-120°	100-120°	100-120°
Voltage	110V,220V,240V	110V,220V,240V	110V,220V,240V	110V,220V,240V
Power	15W	15W	15W	15W
Single trip time	25s	25s	25s	25s
Working temp	5~40	5~40	5~40	5~40
Environmental temp	20~60	20~60	20~60	20~60
Related humidity	20~80%	20~80%	20~80%	20~80%
Color	Silvery/Black matt/ Golden	Silvery/Black matt/ Golden	Silvery/Black matt/ Golden	Silvery/Black matt/ Golden
Remote distance	10m	10m	10m	10m
Control Way	Touch key-press/ Remote control/RS485 central control	Touch key-press/ Remote control/RS485 central control	Touch key-press/ Remote control/RS485 central control	Touch key-press/ Remote control/RS485 central control
Protection way	Cable Manager/Protection finger from nipping	Cable Manager/Protection finger from nipping	Cable Manager/Protection finger from nipping	Cable Manager/Protection finger from nipping


Power protection way	Monitor turn on /off automatically	Monitor turn on /off automatically	Monitor turn on /off automatically	Monitor turn on /off automatically
----------------------	------------------------------------	------------------------------------	------------------------------------	------------------------------------

Function:

1. Electric control, flip up freely;
2. Good stability; shockproof;
3. Operates smoothly, suits to below 22 inch screen;
4. Wireless remote control, centralized control and support RS232, RS485 interface;
5. Hand protection design, more safety for using.
6. Easy to installation and operate.

Installation Way:

This LCD motorized device is designed for table installation.
Make it balance between the device and table and fix it.
Or contact us if any doubt.

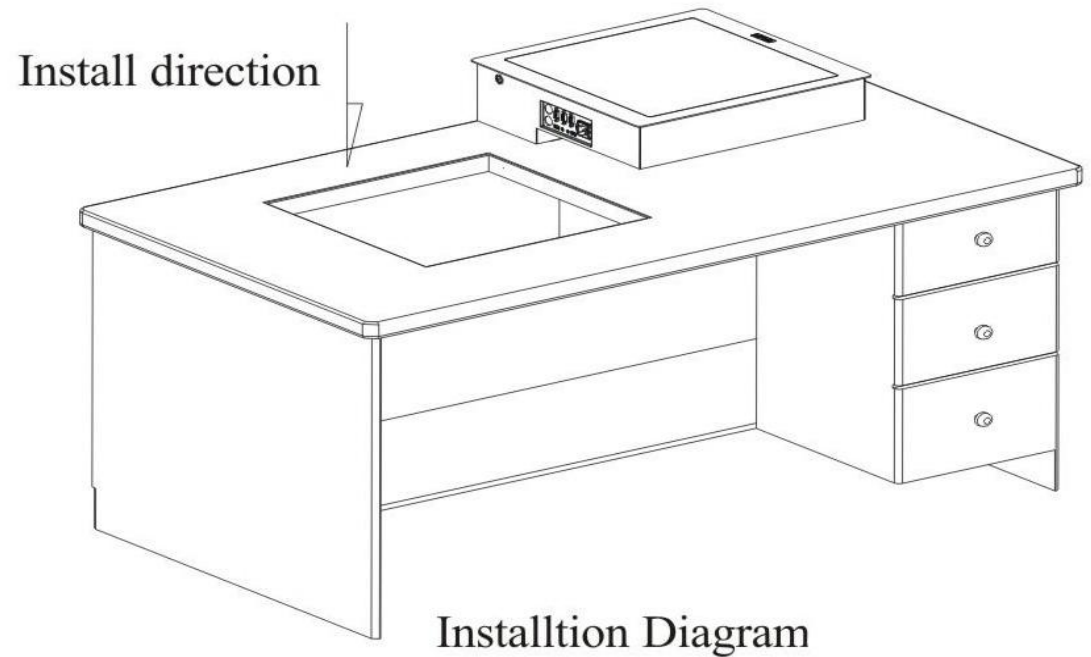

Detail Successful Project:

